




Introduction to Artificial Intelligence


COSC 4550 / COSC 5550

Professor Cheney
10/20/17



perceptron as logical operator

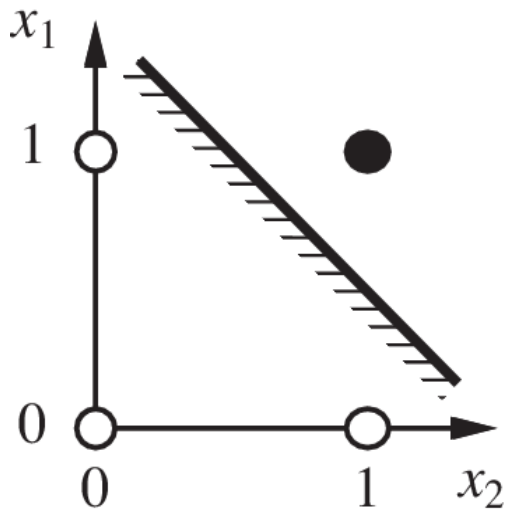


(a) x_1 **and** x_2

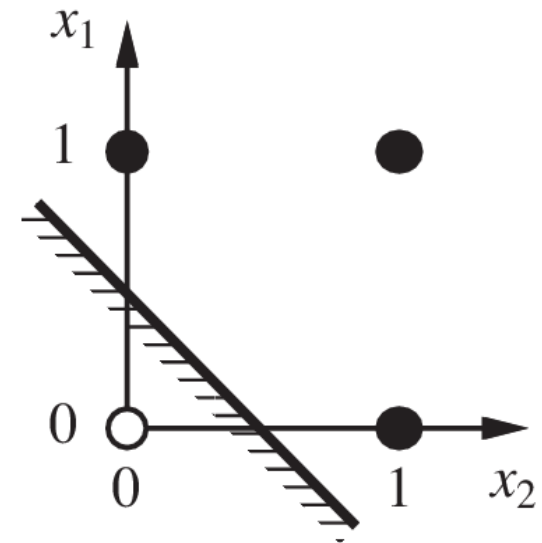

(b) x_1 **or** x_2

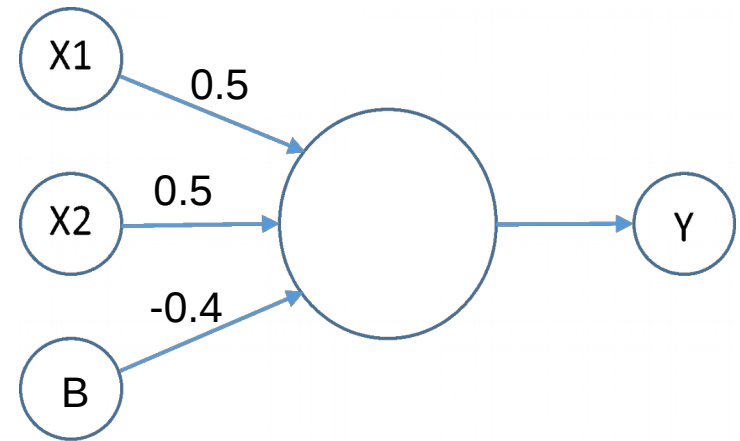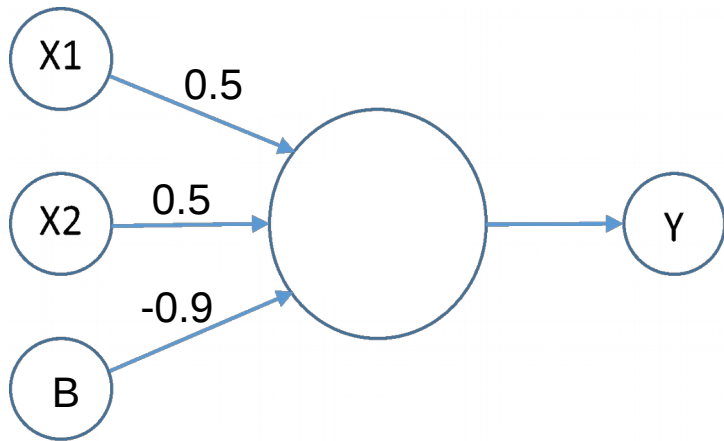

but how do we learn these weights?

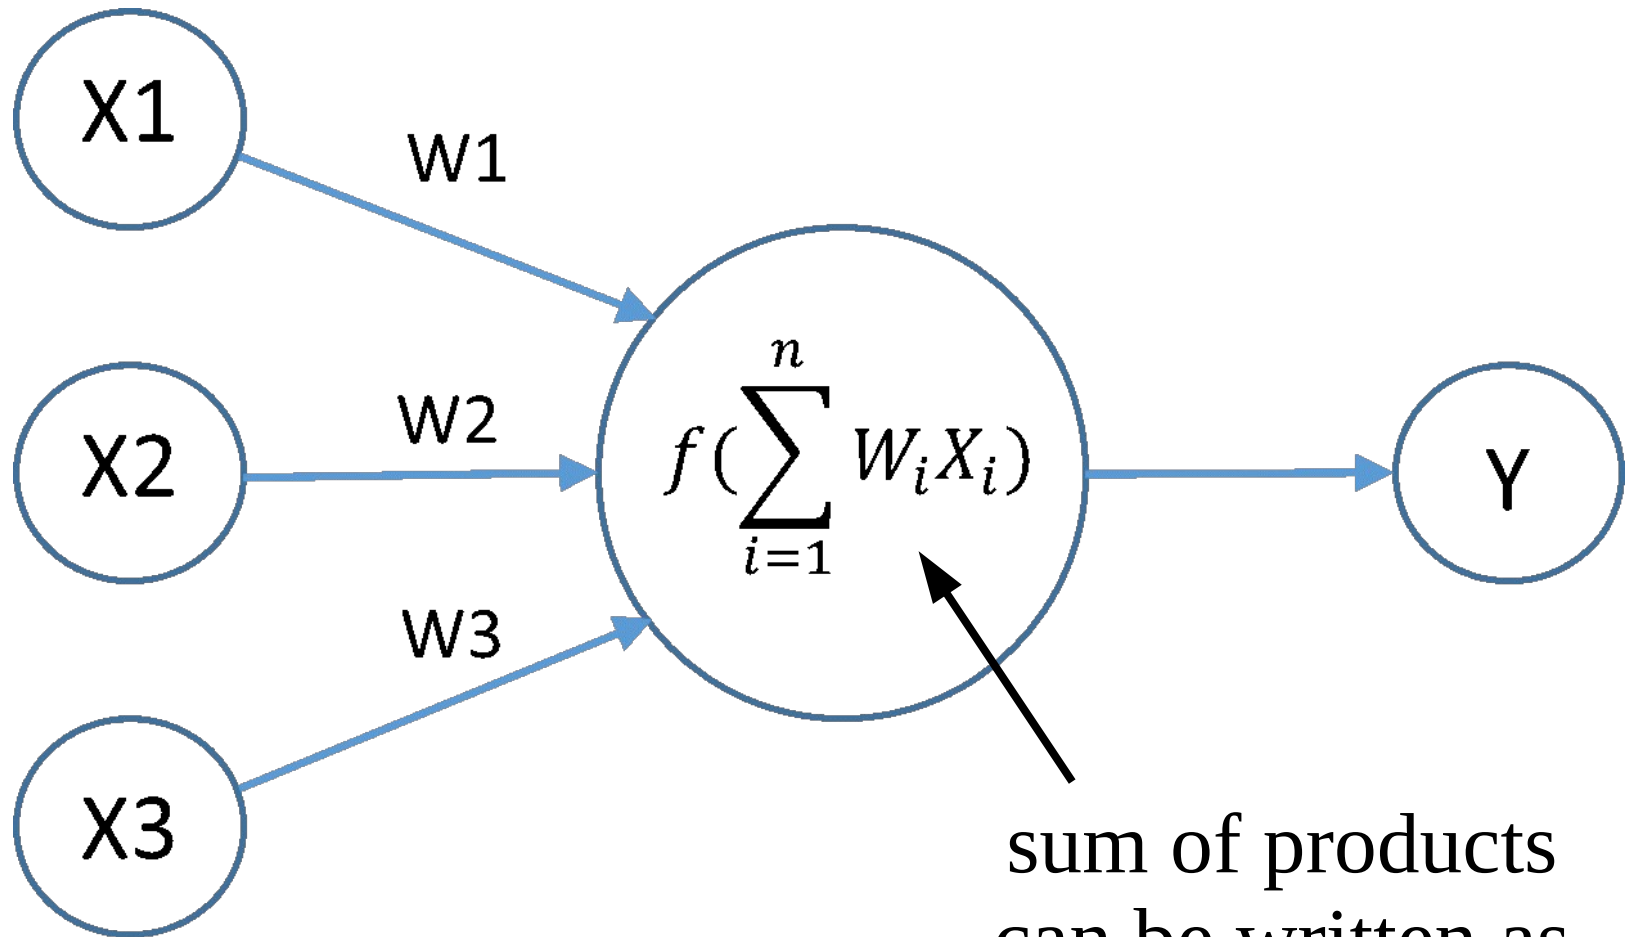

sum of products
can be written as
the dot product of
vectors! ($w \circ x$)

the perceptron (and artificial neuron) are the same as our logistic regression example!

from last class (logistic regression):

$$y = \text{logistic}(w \circ x)$$

neural network activation update:


$$y = \text{sigmoid}(w \circ x)$$

(the sigmoid is a type of logistic function)


with neural networks, we can stack predictors on top of each other in layers (to make them “deep”)!

this allows us to predict which classes of high-level features might be present based on which lower-level (less abstract) features we believe to be present

but at each layer in this stack,
we just have a logistic classification problem,
so we can still find its derivative and perform supervised learning on it (like we've already done)!

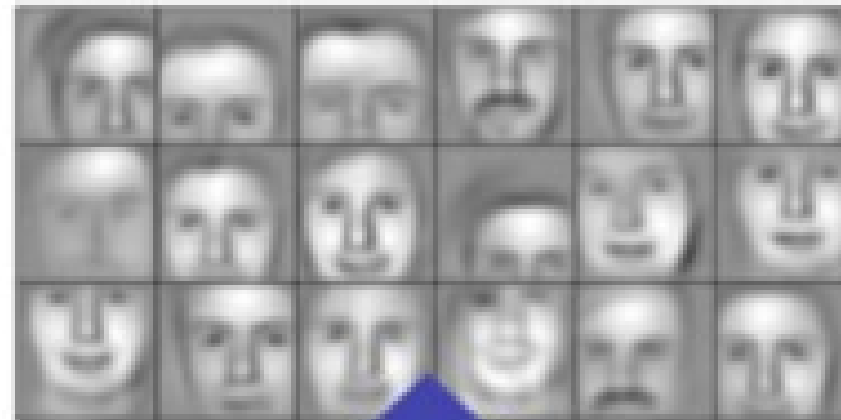

Layer 3

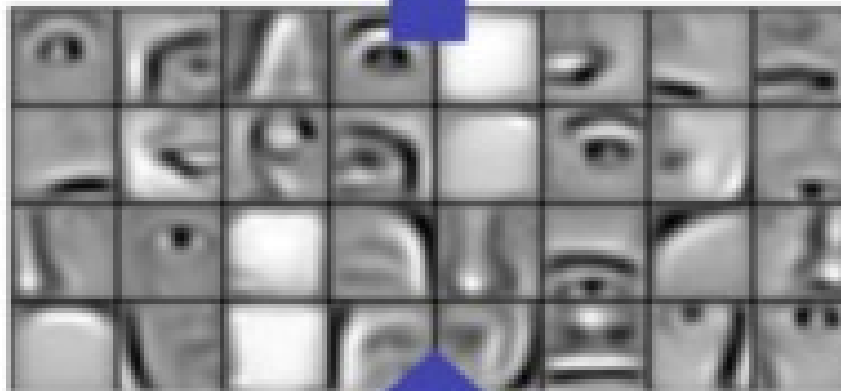




Layer 2




Layer 1




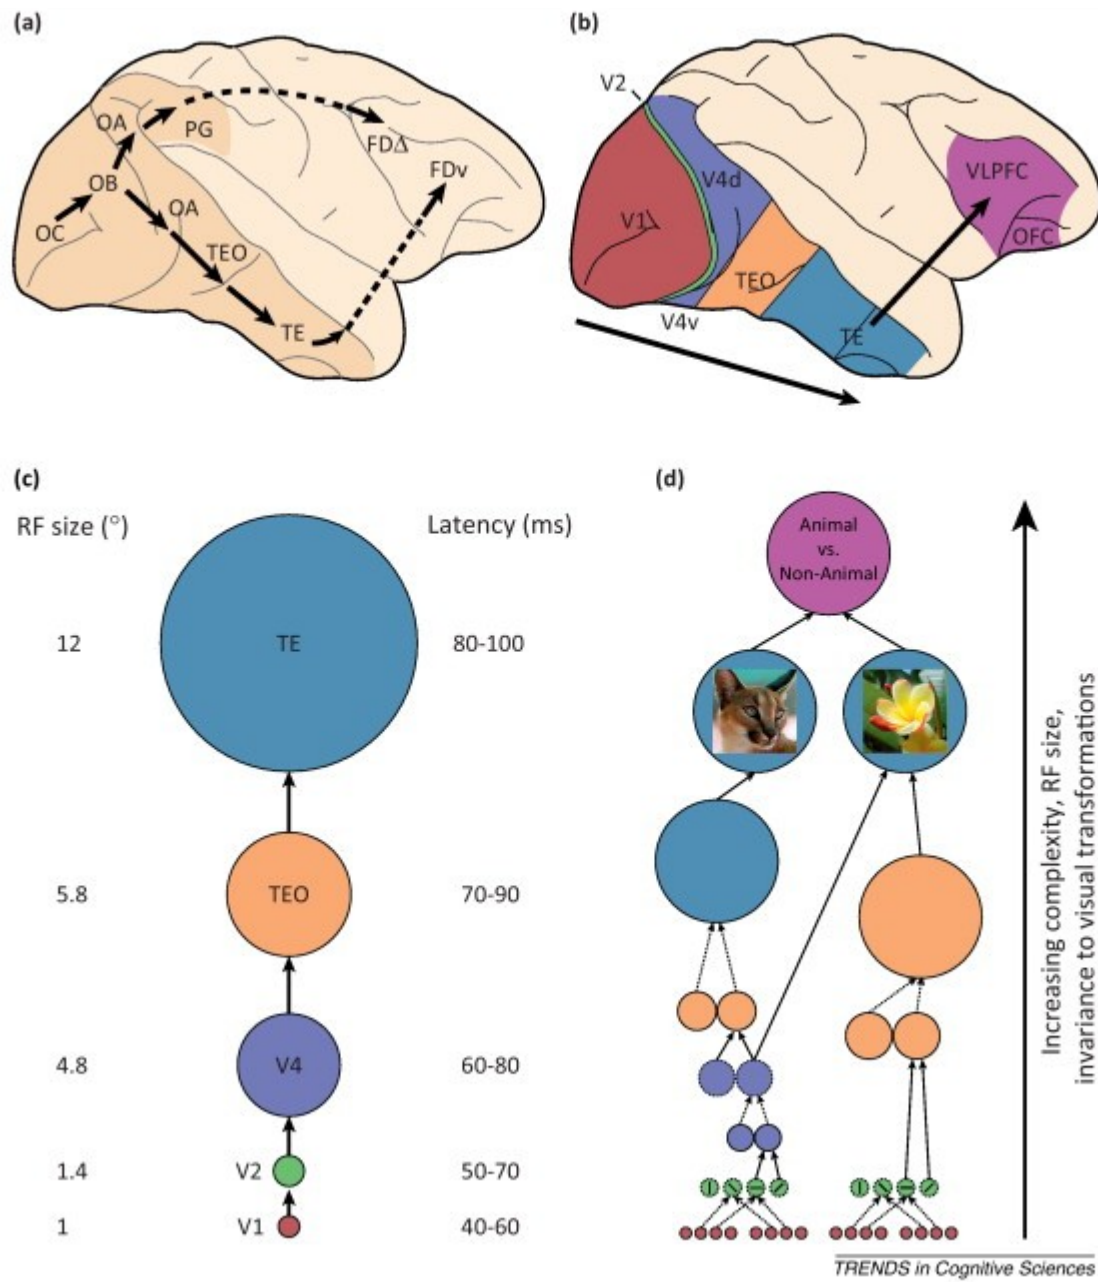


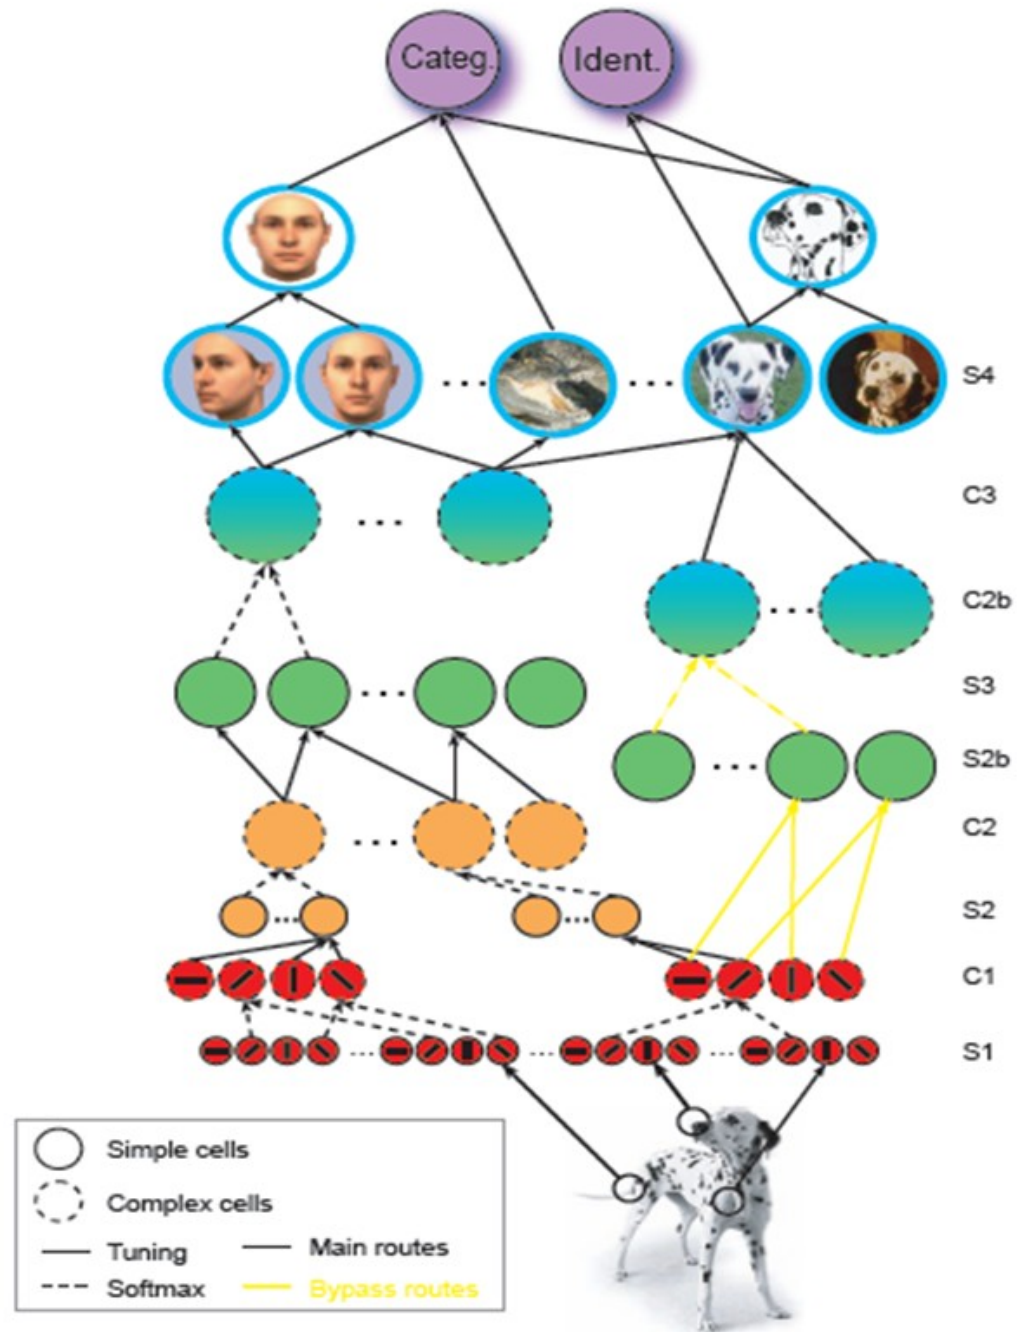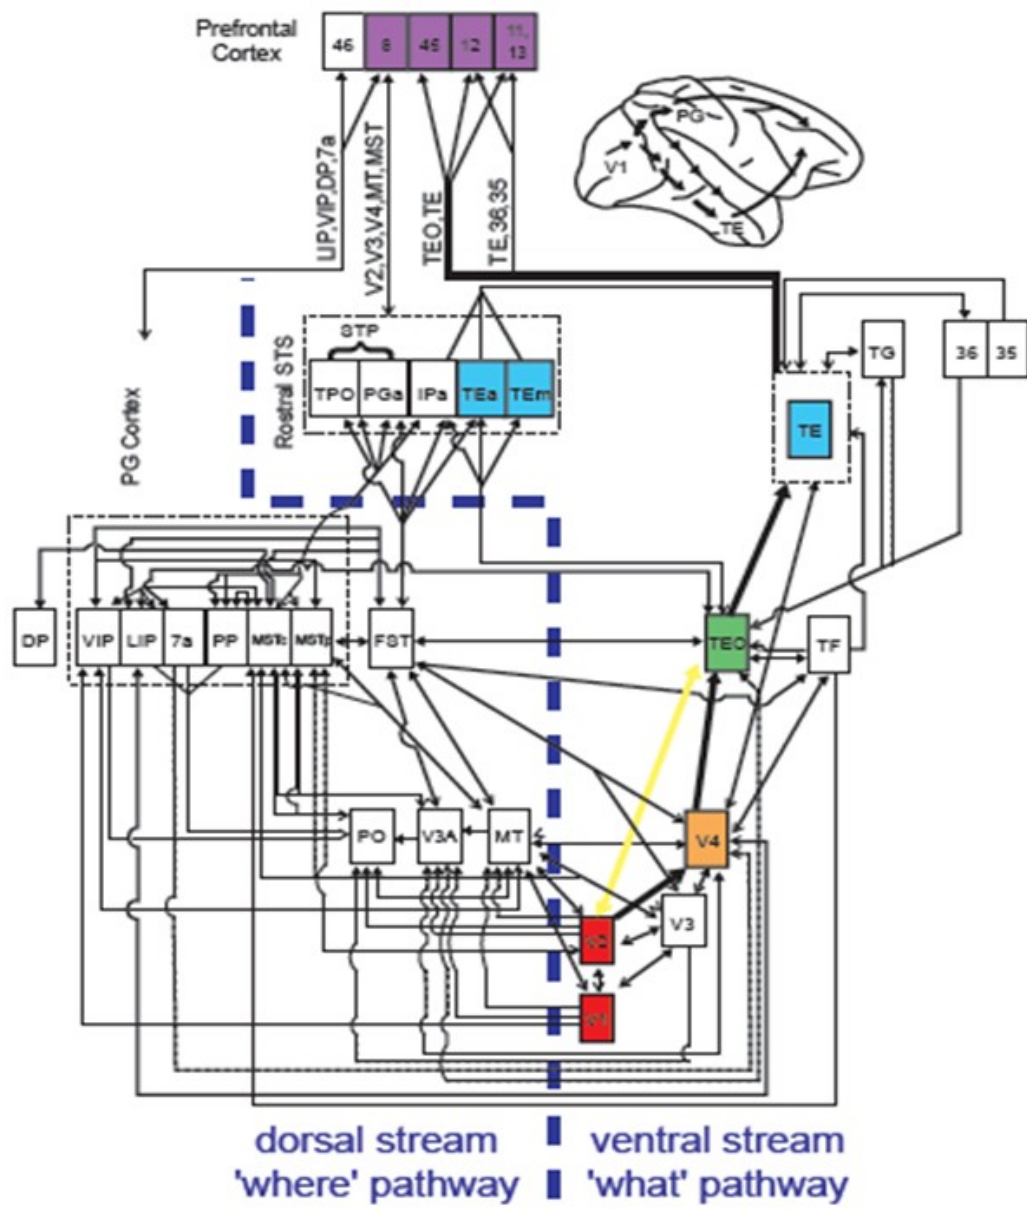

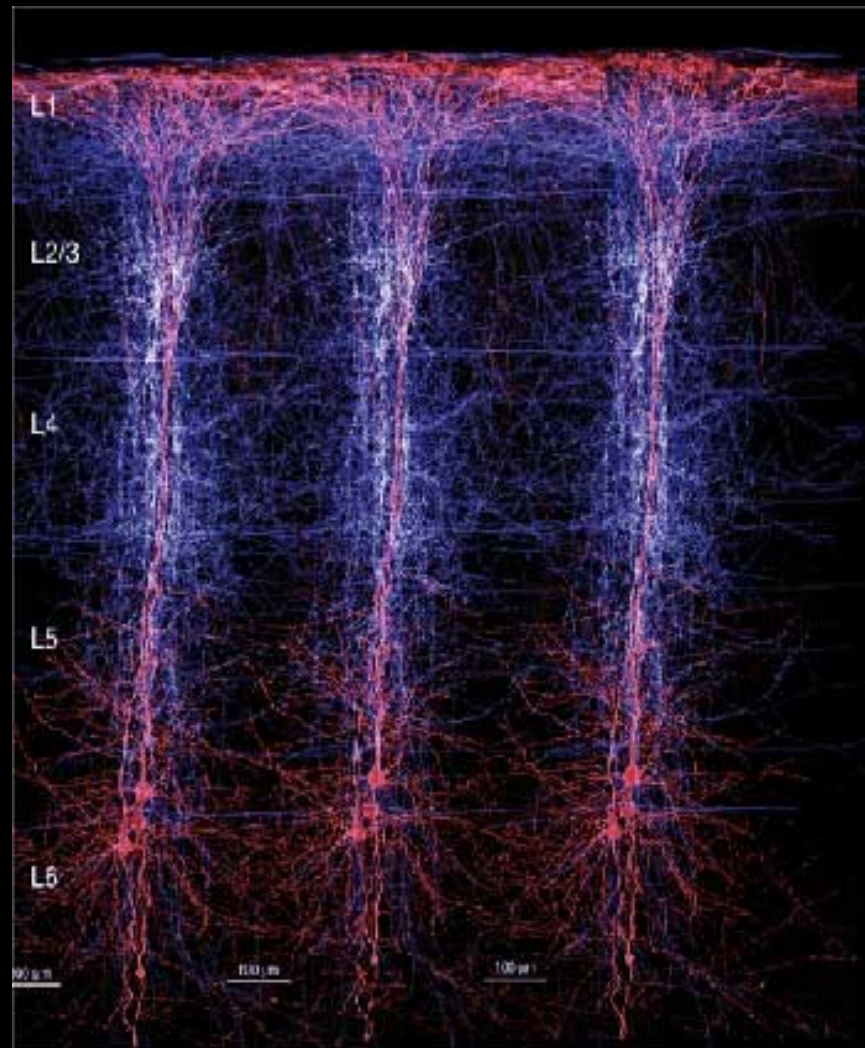


“feedforward” artificial neural network

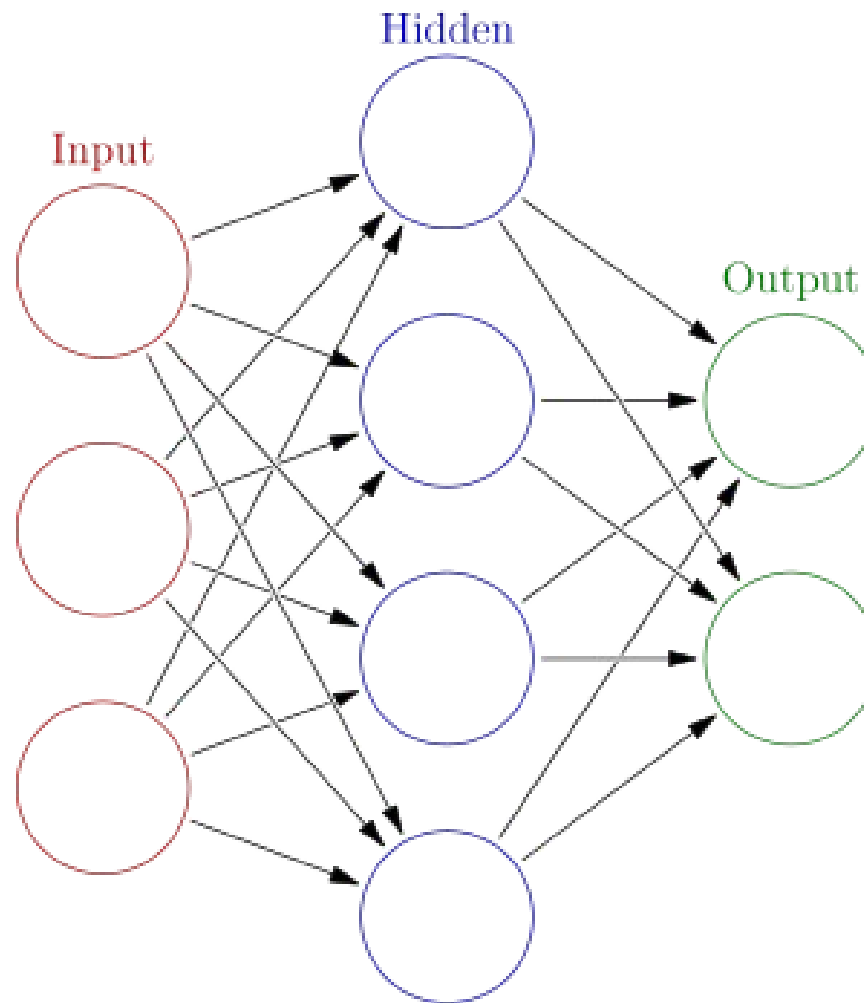

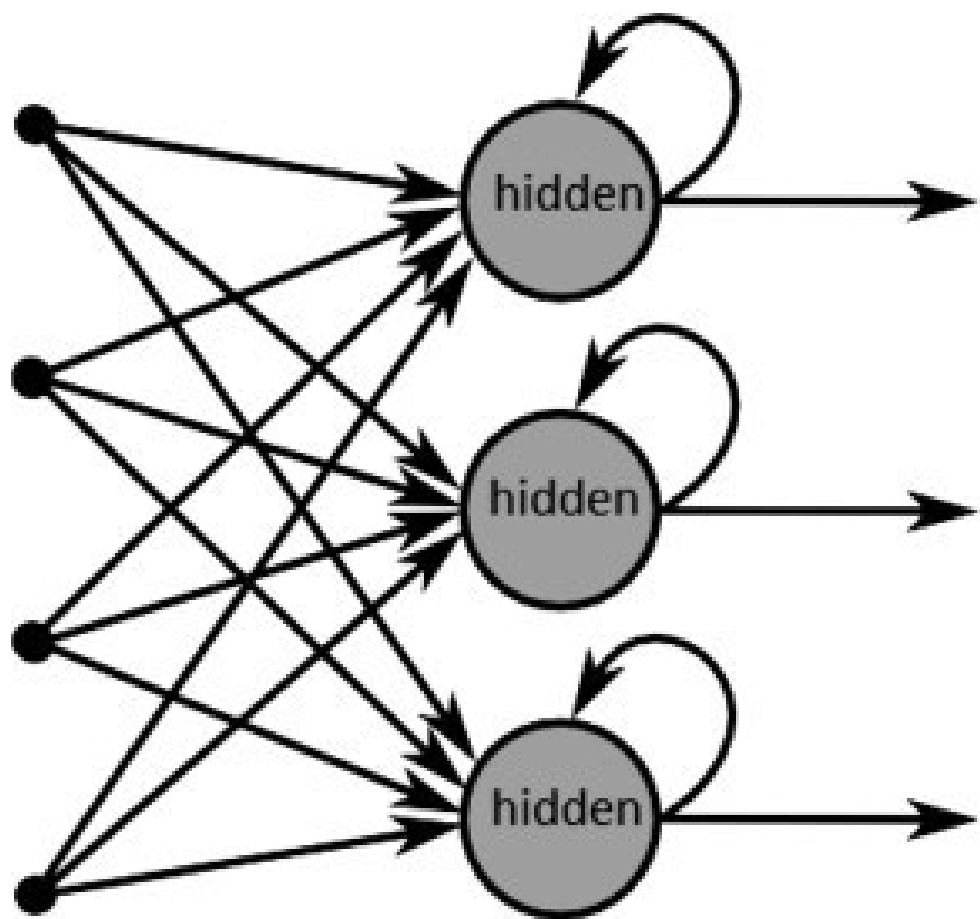


(a) Recurrent neural network

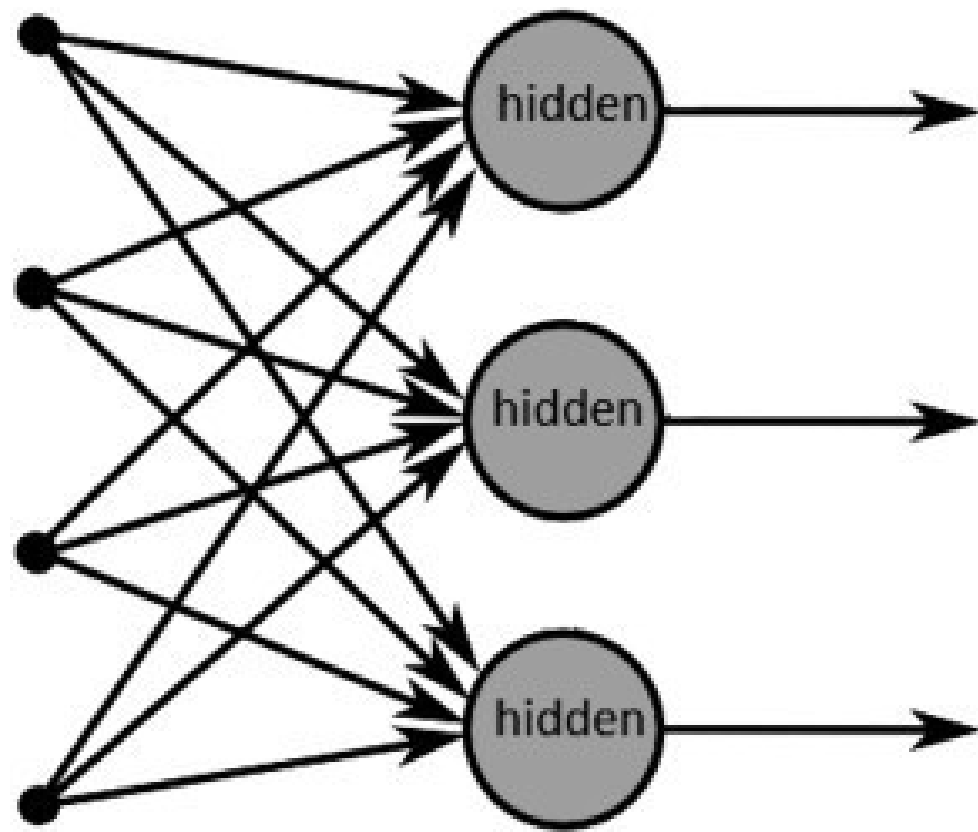


(b) Forward neural network

backpropogation

e.g. $x = [0.05, 0.10]$, $y = [0.01, 0.99]$

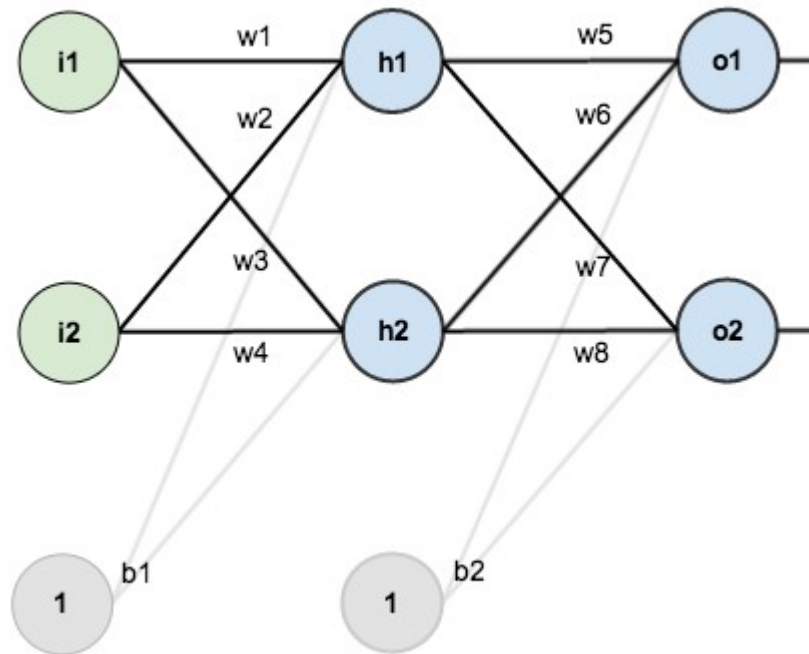


e.g. $x = [0.05, 0.10]$, $y = [0.01, 0.99]$

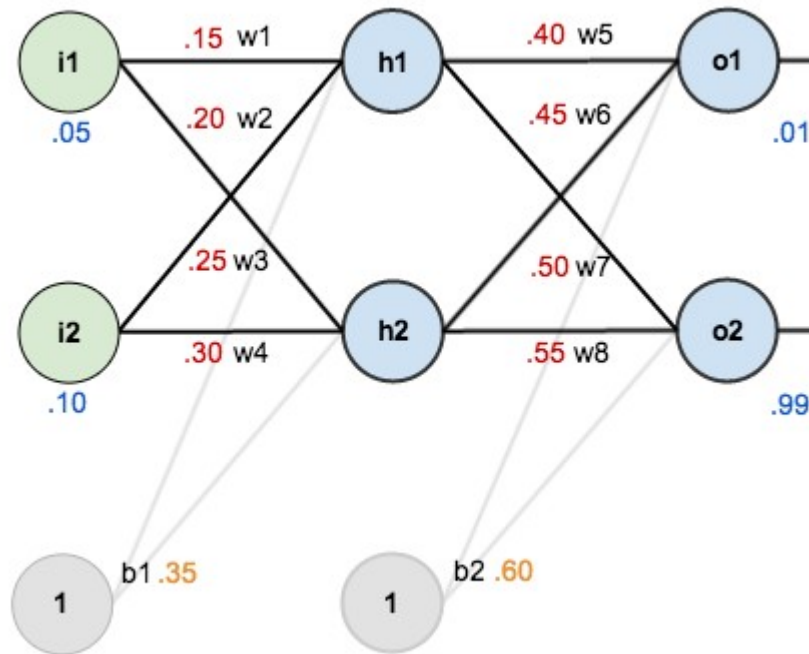

terminology in this example...

We figure out the *total net input* to each hidden layer neuron, *squash* the total net input using an *activation function* (here we use the *logistic function*), then repeat the process with the output layer neurons.

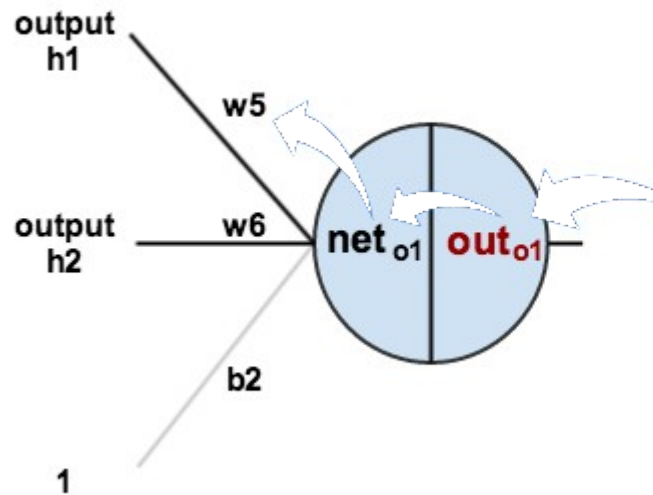


Here's how we calculate the total net input for h_1 :

$$net_{h1} = w_1 * i_1 + w_2 * i_2 + b_1 * 1$$

$$net_{h1} = 0.15 * 0.05 + 0.2 * 0.1 + 0.35 * 1 = 0.3775$$

We then squash it using the logistic function to get the output of h_1 :

$$out_{h1} = \frac{1}{1+e^{-net_{h1}}} = \frac{1}{1+e^{-0.3775}} = 0.593269992$$

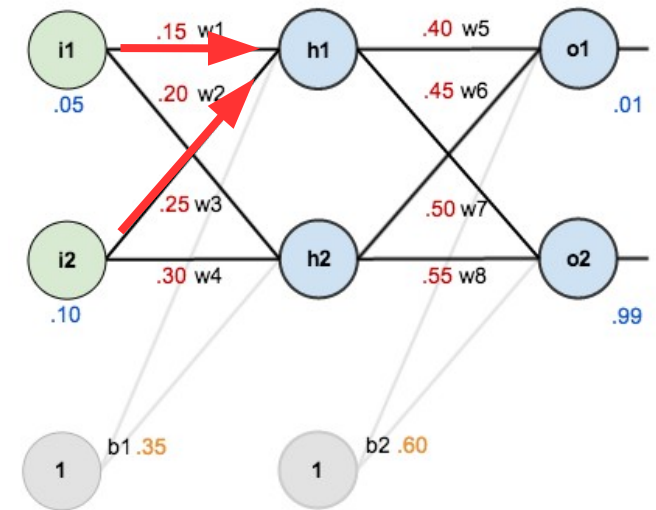

Here's how we calculate the total net input for h_1 :

$$net_{h1} = w_1 * i_1 + w_2 * i_2 + b_1 * 1$$

$$net_{h1} = 0.15 * 0.05 + 0.2 * 0.1 + 0.35 * 1 = 0.3775$$


We then squash it using the logistic function to get the output of h_1 :

$$out_{h1} = \frac{1}{1+e^{-net_{h1}}} = \frac{1}{1+e^{-0.3775}} = 0.593269992$$

Carrying out the same process for h_2 we get:

$$out_{h2} = 0.596884378$$

We repeat this process for the output layer neurons, using the output from the hidden layer neurons as inputs.

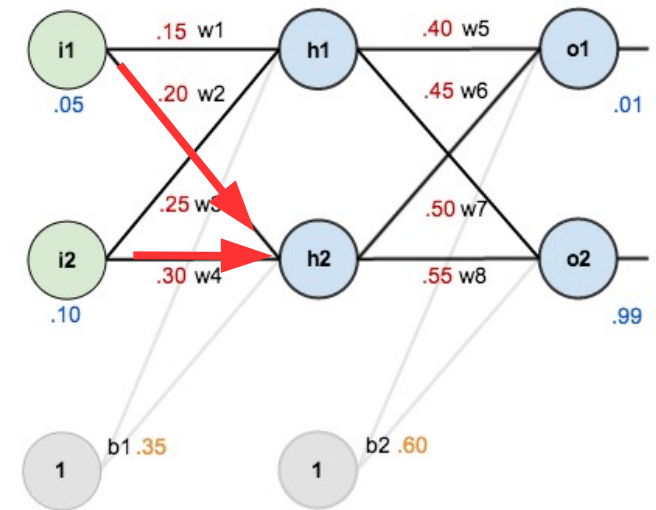


Here's the output for o_1 :

$$net_{o1} = w_5 * out_{h1} + w_6 * out_{h2} + b_2 * 1$$

$$net_{o1} = 0.4 * 0.593269992 + 0.45 * 0.596884378 + 0.6 * 1 = 1.105905967$$

$$out_{o1} = \frac{1}{1+e^{-net_{o1}}} = \frac{1}{1+e^{-1.105905967}} = 0.75136507$$

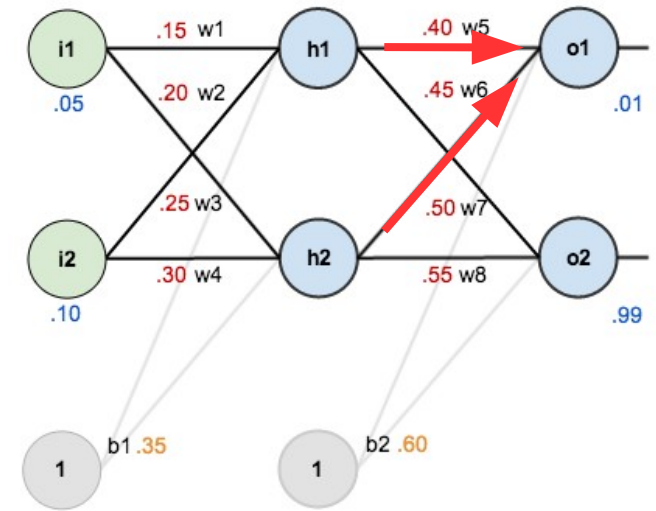

Here's the output for o_1 :


$$net_{o1} = w_5 * out_{h1} + w_6 * out_{h2} + b_2 * 1$$

$$net_{o1} = 0.4 * 0.593269992 + 0.45 * 0.596884378 + 0.6 * 1 = 1.105905967$$

$$out_{o1} = \frac{1}{1+e^{-net_{o1}}} = \frac{1}{1+e^{-1.105905967}} = 0.75136507$$

And carrying out the same process for o_2 we get:

$$out_{o2} = 0.772928465$$

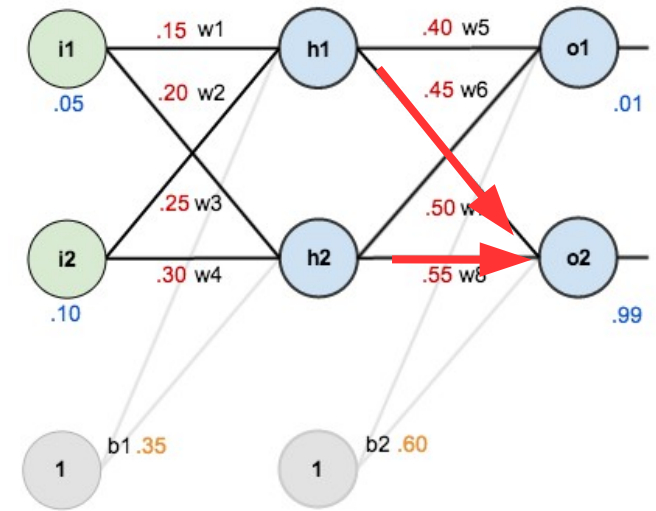


Calculating the Total Error

We can now calculate the error for each output neuron using the [squared error function](#) and sum them to get the total error:


$$E_{total} = \sum \frac{1}{2}(target - output)^2$$

The $\frac{1}{2}$ is included so that exponent is cancelled when we differentiate later on. The result is eventually multiplied by a learning rate anyway so it doesn't matter that we introduce a constant here [1].

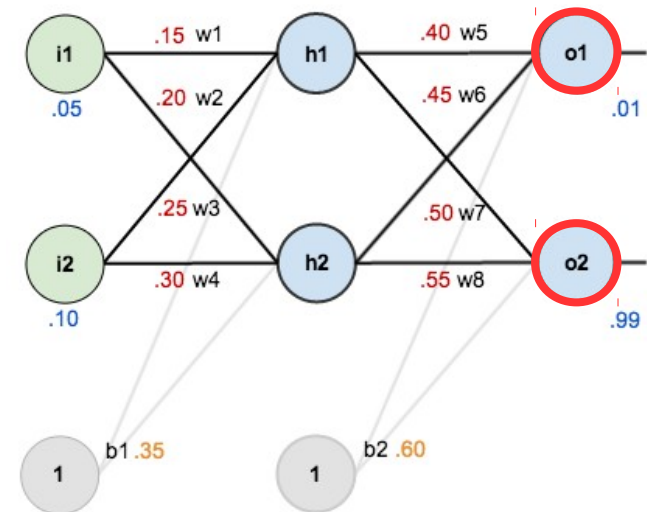

For example, the target output for o_1 is 0.01 but the neural network output 0.75136507, therefore its error is:

$$E_{o1} = \frac{1}{2}(\text{target}_{o1} - \text{out}_{o1})^2 = \frac{1}{2}(0.01 - 0.75136507)^2 = 0.274811083$$

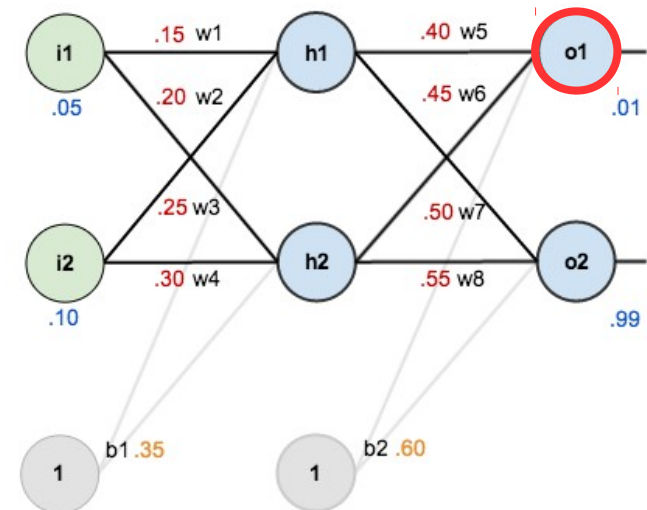

For example, the target output for o_1 is 0.01 but the neural network output 0.75136507, therefore its error is:


$$E_{o1} = \frac{1}{2}(\text{target}_{o1} - \text{out}_{o1})^2 = \frac{1}{2}(0.01 - 0.75136507)^2 = 0.274811083$$

Repeating this process for o_2 (remembering that the target is 0.99) we get:

$$E_{o2} = 0.023560026$$

The total error for the neural network is the sum of these errors:

$$E_{total} = E_{o1} + E_{o2} = 0.274811083 + 0.023560026 = 0.298371109$$

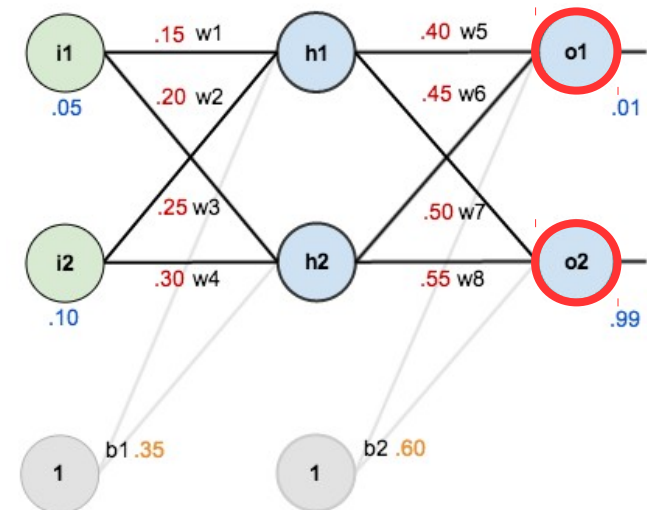

The Backwards Pass


Our goal with backpropagation is to update each of the weights in the network so that they cause the actual output to be closer the target output, thereby minimizing the error for each output neuron and the network as a whole.

Output Layer

Consider w_5 . We want to know how much a change in w_5 affects the total error, aka $\frac{\partial E_{total}}{\partial w_5}$.

By applying the chain rule we know that:


$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

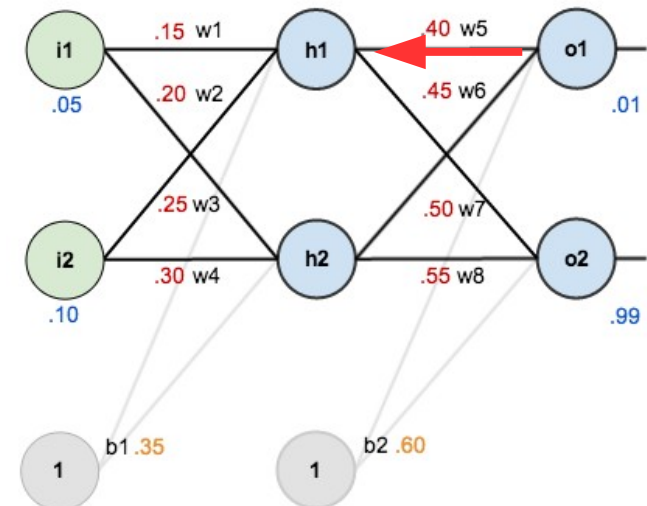

By applying the [chain rule](#) we know that:

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

Visually, here's what we're doing:

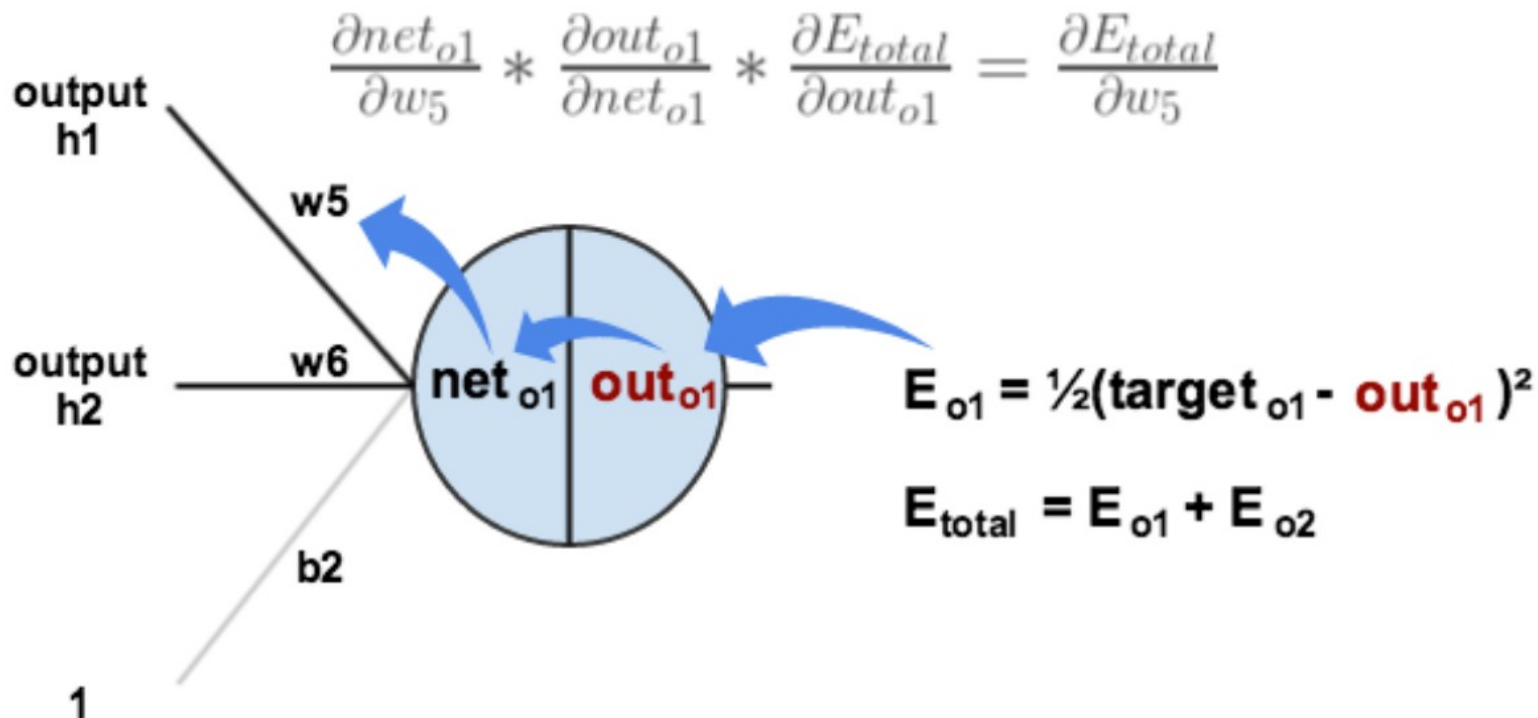

By applying the chain rule we know that:

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

We need to figure out each piece in this equation.


First, how much does the total error change with respect to the output?

$$E_{total} = \frac{1}{2}(target_{o1} - out_{o1})^2 + \frac{1}{2}(target_{o2} - out_{o2})^2$$

$$\frac{\partial E_{total}}{\partial out_{o1}} = 2 * \frac{1}{2}(target_{o1} - out_{o1})^{2-1} * -1 + 0$$

$$\frac{\partial E_{total}}{\partial out_{o1}} = -(target_{o1} - out_{o1}) = -(0.01 - 0.75136507) = 0.741365$$

When we take the partial derivative of the total error with respect to out_{o1} , the quantity $\frac{1}{2}(target_{o2} - out_{o2})^2$ becomes zero because out_{o1} does not affect it which means we're taking the derivative of a constant which is zero.

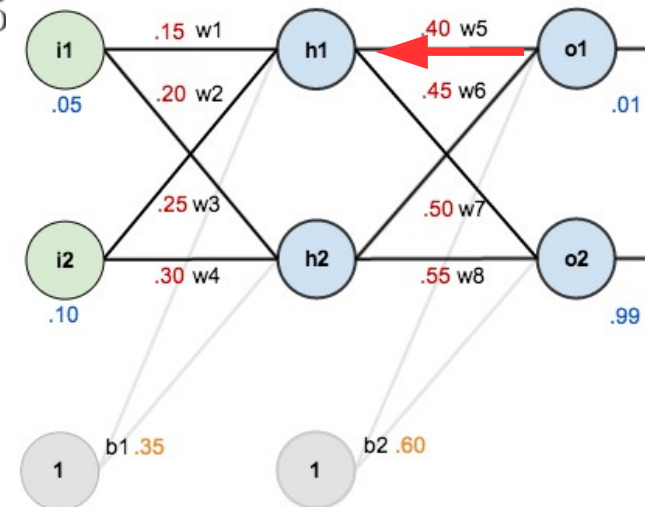

By applying the chain rule we know that:


$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

Next, how much does the output of o_1 change with respect to its total net input?

The partial derivative of the logistic function is the output multiplied by 1 minus the output:

$$out_{o1} = \frac{1}{1 + e^{-net_{o1}}}$$

$$\frac{\partial out_{o1}}{\partial net_{o1}} = out_{o1}(1 - out_{o1}) = 0.75136507(1 - 0.75136507) = 0.186815602$$

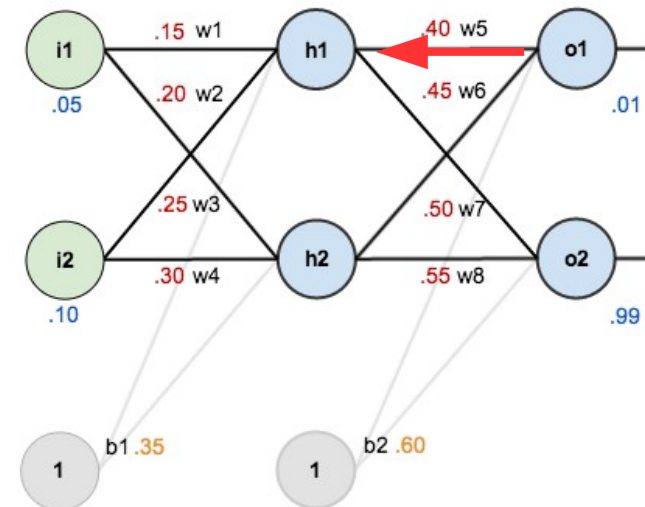


By applying the chain rule we know that:

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

Finally, how much does the total net input of $o1$ change with respect to w_5 ?

$$net_{o1} = w_5 * out_{h1} + w_6 * out_{h2} + b_2 * 1$$

$$\frac{\partial net_{o1}}{\partial w_5} = 1 * out_{h1} * w_5^{(1-1)} + 0 + 0 = out_{h1} = 0.593269992$$

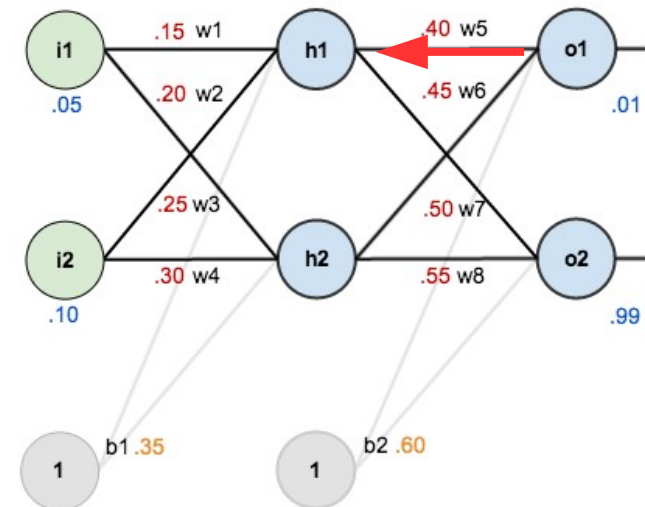

By applying the chain rule we know that:

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$


Putting it all together:

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

$$\frac{\partial E_{total}}{\partial w_5} = 0.74136507 * 0.186815602 * 0.593269992 = 0.082167041$$

You'll often see this calculation combined in the form of the delta rule:

$$\frac{\partial E_{total}}{\partial w_5} = -(target_{o1} - out_{o1}) * out_{o1}(1 - out_{o1}) * out_{h1}$$

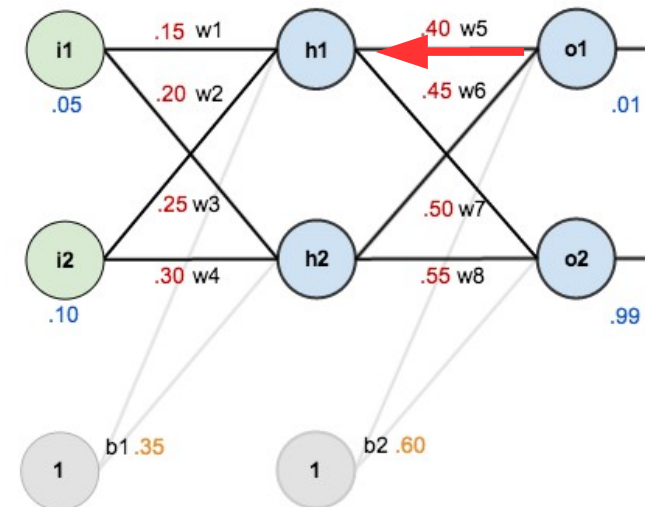

To decrease the error, we then subtract this value from the current weight (optionally multiplied by some learning rate, eta, which we'll set to 0.5):

$$w_5^+ = w_5 - \eta * \frac{\partial E_{total}}{\partial w_5} = 0.4 - 0.5 * 0.082167041 = 0.35891648$$

We can repeat this process to get the new weights w_6 , w_7 , and w_8 :

$$w_6^+ = 0.408666186$$

$$w_7^+ = 0.511301270$$

$$w_8^+ = 0.561370121$$

